

1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2739 2740 2741 2742 2743 2744 2745 2746 2747 2748 2749 2750 2751 2752 2753 2754 2755 2756 2757 2758 2759 2760 2761 2762 2763 2764 2765 2766 2767 2768 2769 2770 2771 2772 2773 2774 2775 2776 2777 2778 2779 2780 2781 2782 2783 2784 2785 2786 2787 2788 2789 2790 2791 2792 2793 2794 2795

U.S. APPLICATION NO. **09/529778**INTERNATIONAL APPLICATION NO.
PCT/NL98/00602ATTORNEY'S DOCKET NUMBER
BO 4159217. ☒ The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):

Neither international preliminary examination fee (37 CFR 1.482)
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO
and International Search Report not prepared by the EPO or JPO \$ 970.00

International preliminary examination fee (37 CFR 1.482) not paid to
USPTO but International Search Report prepared by the EPO or JPO \$840.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO
but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$690.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO
but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO
and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS PTO USE ONLY

\$ 840

Surcharge of \$130.00 for furnishing the oath or declaration later than
months from the earliest claimed priority date (37 CFR 1.492(e)). ☐ 20 ☒ 30

\$ 130

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$
Total claims	11 - 20 =	0	x \$18.00	\$ 0
Independent claims	1 - 3 =	0	x \$78.00	\$ 0
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$260.00

\$

\$

\$

\$

TOTAL OF ABOVE CALCULATIONS = \$ 970

Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement
must also be filed (Note 37 CFR 1.9, 1.27, 1.28).

\$

SUBTOTAL = \$ 970

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

TOTAL NATIONAL FEE = \$ 970

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$

TOTAL FEES ENCLOSED = \$ 970

Amount to be

\$

charged:

\$

a. ☒ A check in the amount of \$ 970 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required by
37 CFR 1.16 and 1.17, or credit any overpayment to Deposit Account No. 25-0120. A duplicate
copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR
1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

April 20, 2000

SEND ALL CORRESPONDENCE TO:

Young & Thompson
745 South 23rd Street
2nd Floor
Arlington, VA 22202
(703) 521-2297

Customer No. 000466

SIGNATURE

Benoit Castel

NAME

35,041
REGISTRATION NUMBER

09/529778

401 Rec'd PCT/PTO 20 APR 2000

PATENTS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Marinus Marias BOONE et al.

Serial No. (unknown)

Filed herewith

HEARING AID FOR IMPROVING
THE HEARING ABILITY OF THE
HARD OF HEARING

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents

Washington, D.C. 20231

Sir:

Prior to the first Official Action and calculation of the filing fee, please amend the above-identified application as follows:

IN THE SPECIFICATION:

Please substitute Page 1 as originally filed with the attached Page 1 which was filed in the Article 34 amendment of January 14, 2000, and is marked "AMENDED SHEET".

IN THE DRAWINGS:

Replace Sheet 2/3 of the drawings as originally filed with Sheet 2/3 of the drawings filed in the Article 34 amendment of January 14, 2000, which is attached hereto and marked "AMENDED SHEET".

IN THE CLAIMS:

Marinus Marias BOONE et al.

Please substitute Claims 1-11 as originally filed, which appear on pages 9 and 10, with Claims 1-11 as filed in the Article 34 amendment of January 14, 2000. The pages containing Claims 1-11 are marked "AMENDED SHEET" and are attached hereto. Please amend these claims as follows:

Claim 3, line 1, cancel "or 2".

Claim 5, line 1, cancel "2, 3, or 4,".

Claim 6, line 1, cancel "2, 3, or 4,".

Claim 8, line 1, cancel "6, or 7,".

Claim 10, line 1, cancel "6, or 7,".


R E M A R K S

The above changes in the specification, claims and drawings merely place the national phase application in the same condition as it was during Chapter II of the international phase, with the multiple dependencies in the claims being removed.

Respectfully submitted,

YOUNG & THOMPSON

By



Benoit Castel
Attorney for Applicant
Registration No. 35,041
745 South 23rd Street
Arlington, VA 22202
Telephone: 703/521-2297

April 20, 2000

Hearing aid for improving the hearing ability of the hard of hearing

The invention relates to a hearing aid for improving the hearing ability of the hard of hearing, comprising an array of microphones, the electrical output signals of which are fed to at least one transmission path belonging to an ear.

A device of this type is known from the article entitled "Development of a directional hearing instrument based on array technology" published in the "Journal of the Acoustical Society of America", Vol. 94, Edition 2, Pt. 1, pages 785-798, August 1993.

It is generally known that loss of hearing in people can be compensated for by means of a hearing aid, in which amplification of the received sound is used. In environments with background noise, for example when several people are speaking at once, as is the case at a cocktail party, the hearing aid amplifies both the desired speech and the noise, as a result of which the ability to hear is not improved.

In the abovementioned article the authors describe an improvement proposal. The hearing aid disclosed in the article consists of an array of, for example, five directional microphones, as a result of which it is possible for the person who is hard of hearing to understand someone who is speaking directly opposite him or her. The background noise which emanates from other directions is suppressed by the array.

From US-A-4 956 867 an apparatus for suppressing signals from noise sources surrounding a target source is known. This apparatus comprises a receiving array including two microphones spaced apart by a distance. The outputs of the microphones are combined such that a primary signal channel and a noise signal channel are obtained. The outputs of the channels are subtracted for cancelling the noise from the primary signal channel.

The aim of the invention is to provide a hearing aid of the type mentioned in the preamble with which the abovementioned disadvantages are avoided and the understandability and the naturalness of the reproduction is improved in a simple manner.

Said aim is achieved according to the invention in that means are provided for deriving two array output signals from the output signals of the microphones, the array having two main sensitivity directions running at an angle with respect to the main axis of the array, and each of which is associated to an array output signal, and in that each array output signal is fed to its own transmission path one to the left ear and the other to the right ear of a person who is hard of hearing.

fig - 4




fig - 5


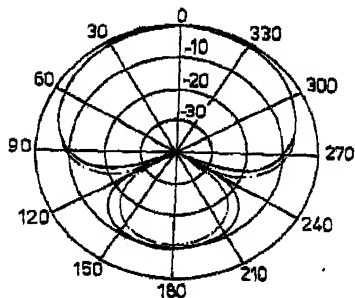


fig - 6

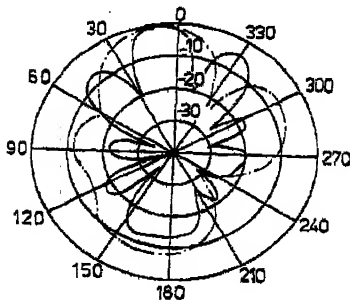

CLAIMS

1. Hearing aid for improving the hearing ability of the hard of hearing, comprising an array of microphones (8-12), the electrical output signals of which are fed to at least one transmission path belonging to an ear, characterised in that means are provided for deriving two array output signals from the output signals of the microphones (8-12; 26-36), the array having two main sensitivity directions (5,6) running at an angle with respect to the main axis of the array, and each of which is associated to an array output signal, and in that each array output signal is fed to its own transmission path, one to the left ear and the other to the right ear of a person who is hard of hearing.

2. Hearing aid according to claim 1, characterised in that the array (29-33) is mounted on the front (2) of a pair of spectacles.

3. Hearing aid according to claim 1 or 2, characterised in that the array is mounted on an arm (3,4) of a pair of spectacles.

4. Hearing aid according to claim 2, characterised in that each arm (3,4) of the spectacles is provided with an array of microphones and in that the output signals from said arrays are each fed to the one or, respectively, the other transmission path.

5. Hearing aid according to claim 1, 2, 3, or 4, characterised in that the means for deriving the array output signals contain a summing device (18), from the output of which an array output signal can be taken off and to the inputs of which the microphone output signals are fed via a respective weighting factor device (13-17).

6. Hearing aid according to claim 1, 2, 3, or 4, characterised in that the means for deriving the array output signals contain a series circuit of a number of summing devices (23, 24, 25, 26) and weighting factor devices (18, 19, 20, 27), the outputs of the microphones (9-11) arranged between the two outermost microphones (8-12) being connected to the other inputs of the summing devices, which other inputs are not connected to a weighting factor device, in that one (12) of the outermost microphones of the array is connected via a weighting factor device (27) to the input of the summing device (26) associated with the adjacent microphone (11) and in that the input of a weighting factor device (18) is connected to the output of the summing device (24) of the microphone adjacent to the other outermost microphone (9), the one input of a summing device (23) being connected to the output of said weighting factor device (18)

the output of the last-mentioned microphones (8) being connected to the other input of the summing device (23) and it being possible to derive an array output signal at the output of the summing device (23).

5 7. Hearing aid according to claim 6, characterised in that the array output signal is derived via a further weighting factor device.

8. Hearing aid according to claim 5, 6, or 7, characterised in that the weighting factor device (13-17, 18, 19, 20, 27) comprises a delay device.

9. Hearing aid according to claim 8, characterised in that the weighting factor device (13-17, 18, 19, 20, 27) comprises an amplitude-adjustment device.

10 10. Hearing aid according to claim 5, 6, or 7, characterised in that the weighting factor device (13-17, 18, 19, 27) comprises a phase-adjustment device.

11. Hearing aid according to claim 10, characterised in that the weighting factor device (13-17, 18, 19, 27) comprises an amplitude-adjustment device.

09/529778

PCT/NL98/00602

WO 99/21400

3/parts

422 Rec'd PCT/PTO 2 0 APR 2000

1

HEARING AID COMPRISING AN ARRAY OF MICROPHONES

5 The invention relates to a hearing aid for improving the hearing ability of the hard of hearing, comprising an array of microphones, the electrical output signals of which are fed to at least one transmission path belonging to an ear.

10 A device of this type is known from the article entitled "Development of a directional hearing instrument based on array technology" published in the "Journal of the Acoustical Society of America", Vol. 94, Edition 2, Pt. 1, pages 785-798, August 1993.

15 It is generally known that loss of hearing in people can be compensated for by means of a hearing aid, in which amplification of the received sound is used. In environments with background noise, for example when several people are speaking at once, as is the case at a cocktail party, the hearing aid amplifies both the desired speech and the noise, as a result of which the ability to hear is not improved.

20 In the abovementioned article the authors describe an improvement proposal. The hearing aid disclosed in the article consists of an array of, for example, five directional microphones, as a result of which it is possible for the person who is hard of hearing to understand someone who is speaking directly opposite him or her. The background noise which emanates from other directions is suppressed by the array.

25 The aim of the invention is to provide a hearing aid of the type mentioned in the preamble with which the abovementioned disadvantages are avoided and the understandability and the naturalness of the reproduction is improved in a simple manner.

30 Said aim is achieved according to the invention in that means are provided for deriving two array output signals from the output signals of the microphones, the array having two main sensitivity directions running at an angle with respect to one another and each of which is associated to an array output signal, and in that each array output signal is fed to its own transmission path belonging to one ear of a person who is hard of hearing.

WO 99/21400

PCT/NL98/00602

2

With this arrangement the signals from the microphones of the array are combined to give a signal for the left ear and a signal for the right ear. The array has two main sensitivity directions or main lobes running at an angle with respect to one another, the left ear signal essentially representing the sound originating from the first main sensitivity direction and the right ear signal representing that from the other main sensitivity direction. The array output signals, that is to say the left ear signal and the right ear signal, are fed via their own transmission path to the left ear and the right ear, respectively. Amplification of the signal and conversion of the electrical signal into a sound signal is employed in said transmission path.

The different main lobes introduce a difference in level between the signals to be fed to the ears. It has been found that it is not only possible to localise sound sources better, but that background noise is also suppressed as a result of the directional effect, as a result of which the understandability of speech is improved despite the existing noise.

The array can advantageously be mounted on the front of a spectacle frame and/or on the arms or springs.

In the case of an embodiment which is preferably to be used, each spectacle arm is also provided with an array of microphones, the output signals from the one array being fed to the one transmission path and the output signals from the other array being fed to the other transmission path.

What is achieved by this means is that understandability is improved not only at high frequencies in the audible sound range but also at relatively low frequencies.

Further embodiments of the invention are described in the subsidiary claims.

The invention will be explained in more detail below with reference to the drawings. In the drawings:

Figure 1 shows an embodiment of the hearing aid according to the invention;

Figure 2 shows a more detailed embodiment of the hearing aid according to the invention;

Figure 3 shows another embodiment of the hearing aid according

WO 99/21400

PCT/NL98/00602

3

to the invention;

Figure 4 shows an embodiment of the hearing aid according to Figure 4 in which a combination of arrays is used, which embodiment is preferably to be used;

- 5 Figure 5 shows a polar diagram of a combined array from Figure 1 at 500 and 1000 Hz;

Figure 6 shows a polar diagram of an embodiment from Figure 1 at 2000 and 4000 Hz; and

- 10 Figure 7 shows the directional index of the embodiment in Figure 4 as a function of the frequency.

The hearing aid according to the invention comprises an array of microphones. Said array can have any shape.

- 15 Said array has two array output signals which are each fed along their own transmission path, one to the left ear and the other to the right ear of the person hard of hearing. In said transmission path amplification and conversion of the electrical signal from the array to sound vibrations are employed in the conventional manner.

- 20 The array has two main sensitivity directions running at an angle with respect to one another, the various features being such that the first array output signal is essentially a reflection of the sound from the first main sensitivity direction, whilst the second array output signal essentially represents the sound from the second main sensitivity
25 direction. As a result the left ear as it were listens in a restricted first main sensitivity direction, whilst the right ear listens in the second main sensitivity direction.

- The main sensitivity directions associated with the array output signals can be achieved by focusing or bundling the
30 microphone signals.

The array of microphones can be attached in a simple manner to spectacle frames. Figure 1 shows an embodiment of an array of microphones on the front of the spectacle frames, bundling being employed.

- 35 In Figure 1 the head of a person hard of hearing is indicated diagrammatically by reference numeral 1. The spectacles worn by this person are shown diagrammatically by straight lines, which spectacles consist, in the conventional

WO 99/21400

PCT/NL98/00602

4

manner, of a front 2 and two spectacle arms or springs 3, 4.

The main lobe 5 for the left ear and the main lobe 6 for the right ear are also shown in Figure 1 as ellipses. Said main lobes are at an angle with respect to one another and with respect to the main axis 7 of the spectacles.

As a result of the main lobes used above and the separate assignment thereof to the ears, a difference between the level of the array output signals is artificially introduced depending on the location of the sound source and also for the noise. As a result of said artificial difference in the levels of the array output signals, the person hard of hearing is able to localise the sound source, but it has been found that said difference also improves the understandability of speech in the presence of noise.

Positioning the array of microphones on one or both of the spectacle arms is also advantageous.

The association of the array output signals to the associated main lobes of the array can be achieved in a simple manner by means of a so-called parallel or serial construction.

In the case of the parallel construction, the means for deriving the array output signals comprise a summing device, the microphone output signals being fed to the inputs of said summing device via a respective frequency-dependent or frequency-independent weighting factor device. An array output signal can then be taken off at the output of the summing device. A main sensitivity direction associated with the relevant array output signal can be obtained by sizing the weighting factor devices.

In the case of the so-called serial construction, the means for deriving the array output signals contain a number of summing devices and weighting factor devices, the weighting factor devices in each case being connected in series with the input and output of the summing devices. With this arrangement one outermost microphone is connected to an input of a weighting factor device, the output of which is then connected to an input of a summing device. The output of the microphone adjacent to the said outermost microphone is connected to the input of the summing device. The output of the summing device

WO 99/21400

PCT/NL98/00602

5

is connected to the input of the next weighting factor device, the output of which is connected to the input of the next summing device. The output of the next microphone is, in turn, connected to the other input of this summing device.

- 5 This configuration is continued as far as the other outermost microphone of the array. An array output signal, for example the left ear signal, can be taken off from the output of the last summing device, the input of which is connected to the output of the last-mentioned outermost microphone. It could
- 10 also be possible to derive the array output signal from the output of the said last summing device via a further weighting factor device.

- In a further development, the weighting factor device comprises a delay device, optionally supplemented by an
- 15 amplitude-adjustment device.

In another development, the weighting factor device consists of a phase adjustment device, optionally supplemented by an amplitude-adjustment device.

- Figure 2 shows the parallel construction with delay
- 20 devices. The microphones 8, 9, 10, 11 and 12 are shown on the right of Figure 2, which microphones are connected by a line in the drawing to indicate that it is an array that is concerned here. The outputs of the microphones 8-12 are connected to the inputs of the respective delay devices 13, 14, 15, 16 and 17.
- 25 The outputs of said delay devices 13-17 are connected to the inputs of the summing device 18, at the output of which an array output signal, for example a left ear signal, can be derived. An amplitude-adjustment device, which can consist of an amplifier or an attenuator, can be incorporated, in a manner
- 30 which is not shown, in each path between a microphone and an input of the summing device. Preferably, the signal of the n^{th} microphone is delayed by a period $n\tau_i$. Figure 2 shows that the output signal from the microphone 8 is fed to the input of the summing device 18 with a delay period 0, whilst the output
- 35 signal from the microphone 9 is fed to the next input of the summing device 18 with a delay τ_i . The corresponding delays apply in the case of the microphones 10, 11 and 12; that is to say delay periods of $2\tau_i$, $3\tau_i$ and $4\tau_i$ respectively. The delay
-

WO 99/21400

PCT/NL98/00602

6

period τ_c is chosen such that sound emanating from the direction which makes an angle of θ with respect to the main axis of the array is summed in phase. Then: $\tau_c = d \sin \theta / c$, where d is the distance between two microphones and c is the wave propagation rate.

A similar arrangement can be designed for the right ear signal.

Figure 3 shows the so-called serial construction with delay devices.

In the case of this embodiment shown a series circuit of 4 delay devices 18-21 and 4 summing devices 22-24 is used. The delay devices and summing devices are connected alternately in series. The microphone 12 is connected to the input of the delay device 21, whilst the outputs of the microphones 8-11 are connected to the respective summing devices 23-26.

With this embodiment as well the signal from the microphone 12 is delayed by a delay period of 4 times τ_c , if each delay device produces a delay of τ_c . After adding in the summing device 26, the output signal from the microphone 11 is delayed by a delay period of 3 times τ_c . Corresponding delays apply in respect of the microphones 9 and 10. The output signal from the microphone 8 is not delayed. If desired, a further delay device can be incorporated behind the summing device 23.

With this so-called serial construction as well it is possible to incorporate amplitude-adjustment devices in the form of amplifiers or attenuators in each part of the series circuit, each amplitude-adjustment device being associated with an output signal from a specific microphone in the array. The delay device used can simply be an all-pass filter of the first order, which can be adjusted by means of a potentiometer.

A microphone array 14 cm long can be used as a practical embodiment. As a consequence of the means described above for deriving the output signals from the microphones which are each associated with one main sensitivity direction, the microphones used can be very simple microphones of omnidirectional sensitivity. If desired, cardioid microphones can be used to obtain additional directional sensitivity.

If the angle between the two main sensitivity directions or

WO 99/21400

PCT/NL98/00602

7

main lobes becomes greater, the difference between the audible signals, i.e. the inter-ear level difference, will become greater. Consequently the localisability will in general become better.

- 5 However, as the said angle between the main lobes becomes greater, the attenuation of a sound signal will increase in the direction of a main axis of the array. The choice of the angle between the main lobes will thus, in practice, be a compromise between a good inter-ear level difference and an acceptable
10 attenuation in the main direction of the array. This choice will preferably be determined experimentally.

- Furthermore, on enlarging the angle between the main lobes, the main lobes will each be split into two lobes beyond a certain angle. This phenomenon can be avoided by use of an
15 amplitude-weighting function for the microphone signals.

- In the case of an embodiment of the invention that is preferably to be used, an array attached to the front of the spectacle frames and two arrays, each attached to one arm of the spectacles, are used. An example with eleven microphones is
20 shown in Figure 4. The microphones 26, 27 and 28, which form the left array, are attached to the left arm of the spectacles and the microphones 34, 35 and 36 of the right array are attached to the right arm of the spectacles. The microphones 29-33 are attached to the front of the spectacle frames.

- 25 The signals from the microphones 29-33 are fed in the manner described above to the transmission paths for the left and the right ear, respectively. The signals from the microphones 26, 27, 28 are coupled to the transmission path for the left ear, whilst the signals from the microphones 34-36 are
30 fed via the other transmission path to the right ear.

- At high frequencies an inter-ear level difference is created with the aid of bundling the array at the front of the spectacle frames and the shadow effect of the arrays on the arms of the spectacles has an influence. At low frequencies an
35 inter-ear time difference is created by means of the arrays on the arms of the spectacles. An inter-ear time difference is defined as the difference in arrival time between the signals at the ears as a consequence of the difference in propagation

WO 99/21400

PCT/NL98/00602

8

time.

Figure 5 shows the directional characteristics of the combination of arrays in Figure 4 at a frequency of 500 Hz, indicated by a dash-and-dot line, and at 1000 Hz, indicated by a continuous line. The directional characteristics in Figure 5 are obtained with the arrays on the arms of the spectacles. The array on the front of the spectacles is thus switched off since it yields little additional directional effect at low frequencies. In this way an inter-ear time difference is thus created.

Figure 6 shows the directional characteristics of the combination of arrays at 2000 Hz, indicated by a dash-and-dot line, and at 4000 Hz, indicated by a continuous line. In the mid and high frequency region of the audible sound range the main lobes are directed at 11° , so that once again an inter-ear level difference is created.

Figure 7 shows the directivity index as a function of the frequency for 3 optimised frequency ranges. The continuous line applies for the low frequencies, optimised at 500 Hz. The broken line applies for optimisation at 4000 Hz and the dash-and-dot line for optimisation at 2300 Hz.

It is also pointed out that an inter-ear level difference can also be produced with the arrays on the arms of the spectacles as with the array on the front of the spectacle frames.

WO 99/21400

PCT/NL98/00602

9

CLAIMS

1. Hearing aid for improving the hearing ability of the hard of hearing, comprising an array of microphones, the electrical output signals of which are fed to at least one transmission path belonging to an ear, characterised in that means are provided for deriving two array output signals from the output signals of the microphones, the array having two main sensitivity directions running at an angle with respect to one another and each of which is associated to an array output signal, and in that each array output signal is fed to its own transmission path belonging to one ear of a person who is hard of hearing.

2. Hearing aid according to Claim 1, characterised in that the array is mounted on the front of a pair of spectacles.

3. Hearing aid according to Claim 1 or 2, characterised in that the array is mounted on an arm of a pair of spectacles.

4. Hearing aid according to Claim 2, characterised in that each arm of the spectacles is provided with an array of microphones and in that the output signals from said arrays are each fed to the one or, respectively, the other transmission path.

5. Hearing aid according to Claim 1, 2, 3, or 4, characterised in that the means for deriving the array output signals contain a summing device, from the output of which an array output signal can be taken off and to the inputs of which the microphone output signals are fed via a respective weighting factor device.

6. Hearing aid according to Claim 1, 2, 3 or 4, characterised in that the means for deriving the array output signals contain a series circuit of a number of summing devices and weighting factor devices, the outputs of the microphones arranged between the two outermost microphones being connected to the other inputs of the summing devices, which other inputs are not connected to a weighting factor device, in that one of the outermost microphones of the array is connected via a weighting factor device to the input of the summing device associated with the adjacent microphone and in that the input

WO 99/21400

PCT/NL98/00602

10

of a weighting factor device is connected to the output of the summing device of the microphone adjacent to the other outermost microphone, the one input of a summing device being connected to the output of said weighting factor device, the
5 output of the last-mentioned microphone being connected to the other input of the summing device and it being possible to derive an array output signal at the output of the summing device.

7. Hearing aid according to Claim 6, characterised in that
10 the array output signal is derived via a further weighting factor device.

8. Hearing aid according to Claim 5, 6 or 7, characterised in that the weighting factor device comprises a delay device.

9. Hearing aid according to Claim 8, characterised in that
15 the weighting factor device comprises an amplitude-adjustment device.

10. Hearing aid according to Claim 5, 6 or 7, characterised in that the weighting factor device comprises a phase-adjustment device.

20 11. Hearing aid according to Claim 10, characterised in that the weighting factor device comprises an amplitude-adjustment device.

fig-1

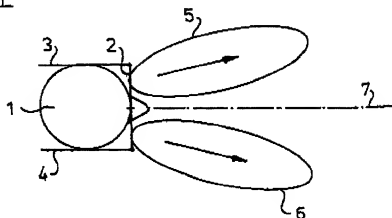


fig-2


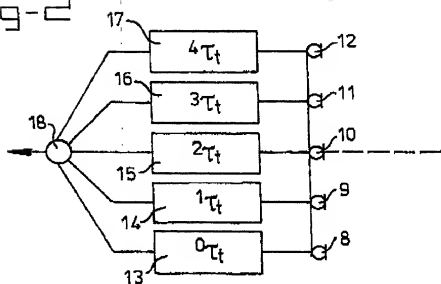


fig-3

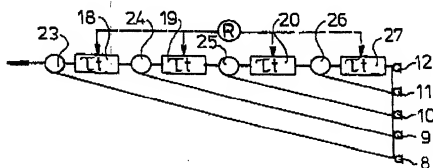

09/529778

PCT/NL98/00602

WO 99/21400

2/3

fig-4




fig-5


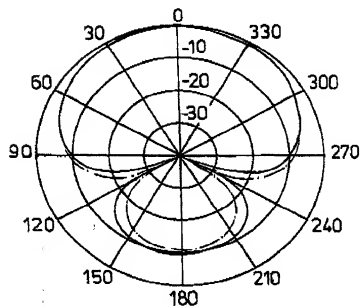


fig-6

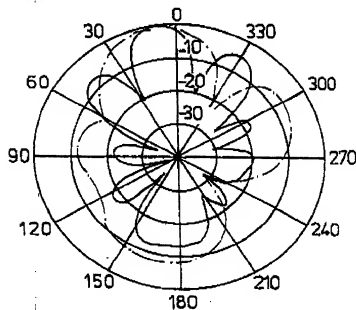


WO 99/21400

09/529778

PCT/NL98/00602

3/3

fig -7

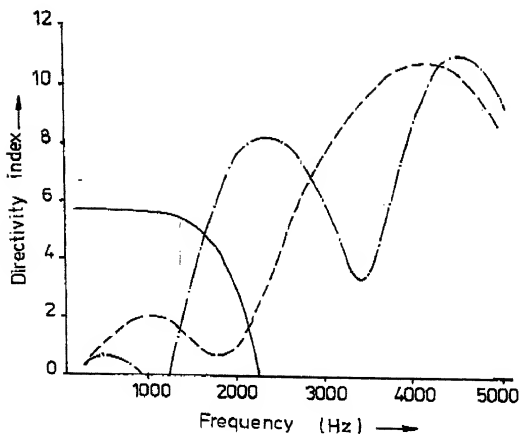

COMBINED DECLARATION AND POWER OF ATTORNEY

(ORIGINAL DESIGN, NATIONAL STAGE OF PCT OR CIP APPLICATION)

As a below named inventor, I hereby declare that

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Hearing aid comprising an array of microphones

the specification of which: (complete (a), (b) or (c) for type of application)

REGULAR OR DESIGN APPLICATION

- a. ☐ is attached hereto.
b. ☐ was filed on _____ as Application
Serial No. _____ and was amended on _____
(if applicable)

PCT FILED APPLICATION ENTERING NATIONAL STAGE

- c. ☒ was described and claimed in International application No. PCT/NL98/00602
filed on 20 October 1998
and as amended on _____ (if any)

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, paragraph 1.56(a).

In compliance with this duty there is attached an information disclosure statement 37 CFR 1.97

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code paragraph 119 of any foreign application (s) for patent of inventor's certificate listed below and have also identified below any foreign application for patent of inventor's certificate having a filing date before that of the application on which priority is claimed.

(complete (d) or (e))

- d. ☐ no such applications have been filed
e. ☒ such applications have been filed as follows

**EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO SAID APPLICATION**

Country	Application Number	Date of filing (day, month, year)	Date of Issue (day, month, year)	Priority claimed
The Netherlands	1007321	20 October 1997		Yes

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO SAID APPLICATION**

CONTINUATION-IN-PART

(Complete this part only if this is a continuation-in-part application)

I hereby declare claim the benefit under Title 35, United States code, paragraph 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claim of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, paragraph 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, paragraph 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (Filing date) (Status) (patented, pending, abandoned)

(Application Serial No.) (Filing date) (Status) (patented, pending, abandoned)

POWER OF ATTORNEY


As a named inventor, I hereby appoint the following attorney(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Robert J. PATCH, Reg. No. 17,355, Andrew J. PATCH, Reg. No. 32,925, Robert F. HARGEST, Reg. No. 25,590, Benoît CASTEL, Reg. No. 35,041, Eric Jensen, Reg. No. 37,855, and Thomas W. PERKINS, Reg. No. 33,027 c/o YOUNG & THOMPSON, Second Floor, 745 South 23rd Street, Arlington, Virginia 22202.

Address all telephone calls to Young & Thompson at 703/521-2297.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: BOONE, Marinus Marias

Inventor's signature



Date 29 May 2000


Country of Citizenship: The Netherlands

Residence: ZOETERMEER, The Netherlands

Post Office Address: Voorweg 105A, NL-2715 NG ZOETERMEER, The Netherlands

Full name of second inventor: BERKHOUT, Augustinus Johannes

Inventor's signature



Date 29 May 2000

Country of Citizenship: The Netherlands

Residence: DEN HAAG, The Netherlands

Post Office Address: Nieuwe Parklaan 30, NL-2597 LD DEN HAAG, The Netherlands

Full name of second inventor: MERKS, Ivo Léon Diane Marie

Inventor's signature



Date 29 May 2000

Country of Citizenship: The Netherlands

Residence: EINDHOVEN, The Netherlands

Post Office Address: Karel de Grotelaan 75, NL-5615 SP EINDHOVEN, The Netherlands

CHECK PROPER BOX(ES) FOR ANY ADDED PAGE(S) FORMING A PART OF THIS DECLARATION